

### Application

The AmeKai Sprinkler gauges are approved by the Factory Mutual System and are listed by the UL for use on wet or dry sprinkler system.

### Size

3.5"

### Accuracy

+/- 3-2-3% of Span

### Ranges

0~300psi

0~80 retarded to 250psi

### Connection

Material: Copper alloy

Lower mount (LM)

1/4"NPT

### Bourdon Tube

Material: Copper alloy,

C-type

### Dial

Aluminum, white background with black markings

### Pointer

Aluminum, black finish

### Case

ABS, black finish

### Movement

Copper Alloy

### Window

High impact-resistant twist-on polycarbonate



### Order Options (min. order may apply)



Customized dials

This specification relates to our current standard regarding design, dimensions and materials.  
AmeKai reserves the right to make changes or modifications without prior notice.

#### Ordering Information:

State type number/ size/ range/ connection size and location/ options required.

Revision: B' 00.03

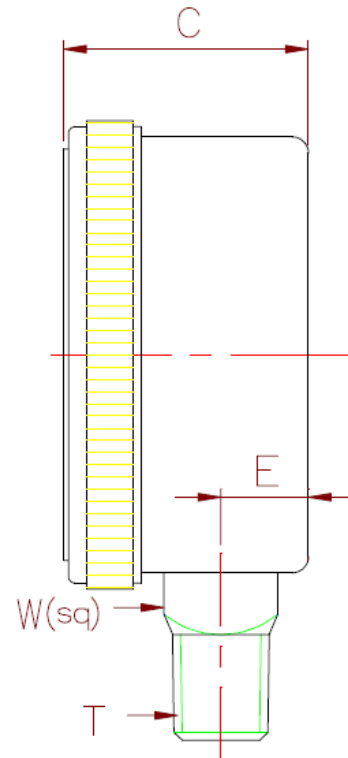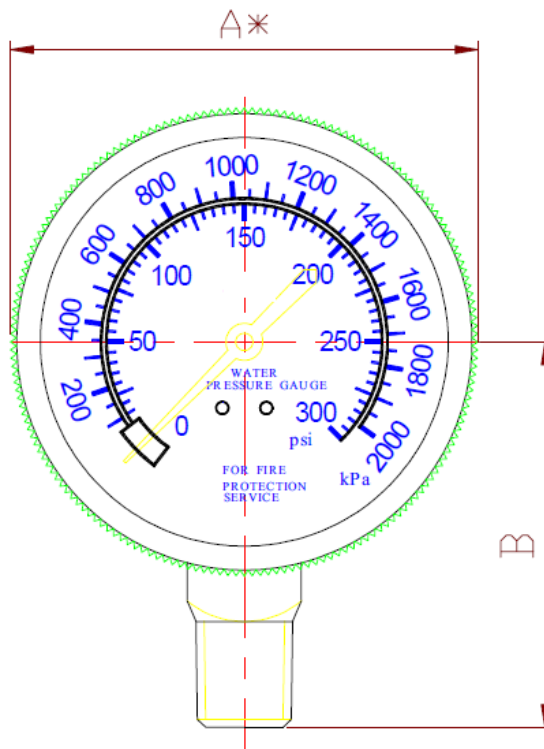

A\*NOMINAL SIZE

3-1/2"	WEIGHT	KEY	A*	B	C	E	T	W
		mm	97.8	74.6	30.2	10.4		14.0
		in	3.850	2.937	1.188	.409		.551

(DIMENSION CHANGE ALL RIGHTS RESERVED. BY AK.)

This specification relates to our current standard regarding design, dimensions and materials.  
AmeKai reserves the right to make changes or modifications without prior notice.

Ordering Information:  
State type number/ size/ range/ connection size and location/ options required.

Revision: B' 00.03