

Fireriser® Butterfly Valve

Bronze Butterfly Valve, UL, ULC Listed/FM Approved
BG Grooved End, Size: 2" and 2-1/2"

Fig.No.:BG


Specifications

Working Pressure: 175 PSI (12.5 Bars)
 Max.Test Pressure: 350 PSI (25.0 Bars)
 Max.Working Temp. : 250°F (120°C)
 Factory Installed UL Listed Double Tamper Switches
 Valve Approved For Indoor and Outdoor Use



Primary Materials:

Component	Material
Body	ASTM B-505
Disc	ASTM B-548 EPDM Encapsulated
Upper Stem	ASTM A-564 Type XM12
Lower Stem	ASTM A-564 Type XM12
Gear Housing Cover	ASTM A-619
Hand Wheel	ASTM A-619
Flag Indicator	ASTM B-16
Yoke Mechanism	ASTM A-283
Stem Bushing	ASTM B-16
Conduit Connector	ASTM A-307
O-Rings	EPDM Grade"E"
Cover Gasket	NBR9

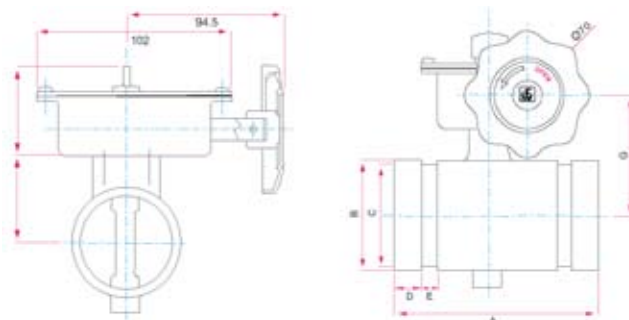

Dimensions:

Size in/mm	A	B	C	D	E	F	G
2/50	4.56(114)	2.41(60.3)	2.29(57.15)	0.64(16)	0.32(8)	1.96(49)	3.62(90.5)
2-1/2/65	4.56(114)	3.0(75)	2.75(69.1)	0.64(16)	0.32(8)	2.18(54.5)	3.82(95.5)

Patent Pending.